

WARNING

FILLING YOUR MAINTENANCE FREE BATTERY

FAILURE TO FOLLOW THESE INSTRUCTIONS PRECISELY MAY RESULT IN ACID DAMAGE TO CLOTHING, WORKTOPS AND MOTORCYCLE

THE MANUFACTURERS, DISTRIBUTORS AND SUPPLIERS CANNOT BE HELD RESPONSIBLE FOR ANY SUCH DAMAGE

1. Remove filler cap strip (where fitted) (Fig.1) from bottle, to expose silver sealed foils, do not remove the silver foils

(Note: the bottle contains the exact amount of acid for the battery)

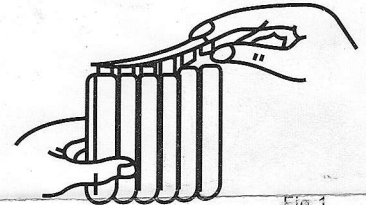


Fig.1

2. Line up the neck of the bottle with the battery filling holes (Fig.2)

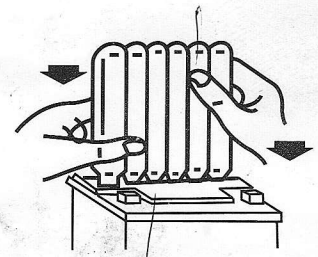


Fig.2

3. Push bottle down into the holes piercing the seals and allowing electrolyte to flow into battery

4. When all the fluid has drained into the battery remove empty bottle and firmly press the sealer cap into position over battery vent holes (Fig.3)

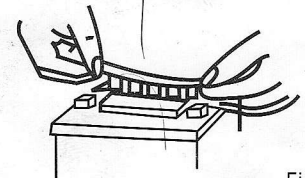


Fig.3

5. Use only in stand up position